



## Dimension

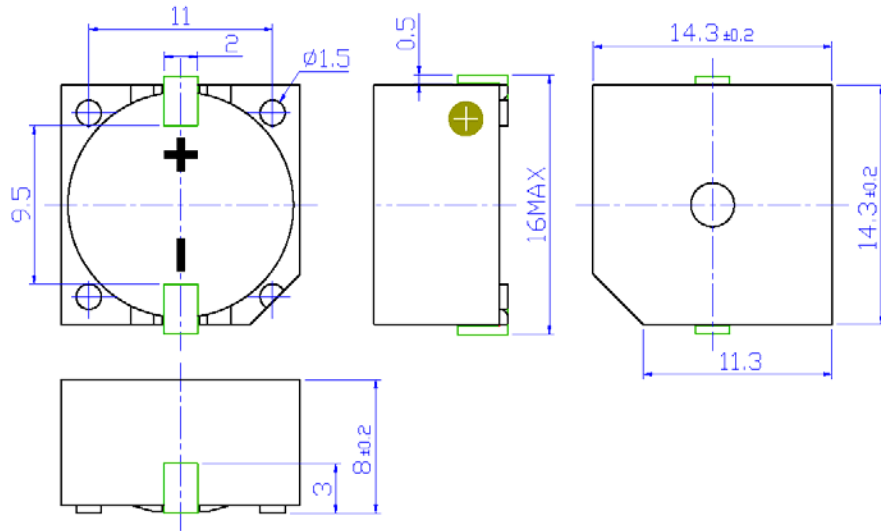

## Frequency response

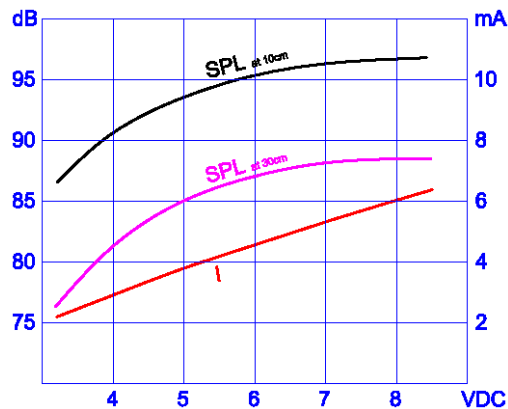

## Piezo Buzzer (self drive)

### ■ BE-P1414C-T05-S

#### Feature

- RoHS Compliance
- Built-in drive
- SMD Termination

#### Specification

Electrical specifications are measured at 20 $\pm$ 2 Degree Celsius, Humidity 65 $\pm$ 5%

Rated Voltage (Vdc)	5
Operating Voltage (Vdc)	3 ~ 16
Current Consumption (mA)	max. 8
Capacitance (pF) at 4kHz	-
S.P.L. (dB Distance at 10cm)	min. 85
Resonance Frequency (Hz)	4000
Operating Temperature Range (°C)	-40 ~ +85
Storage Temperature Range (°C)	-40 ~ +90
Contact type	SMD

BE-FS/69 Rev.:0

Copyright © 2006 Bujeon Europe GmbH. This specification is subject to change without notice in order to improve reliability, function or design. Please contact us for technical specifications before purchase or use.