



Dimension

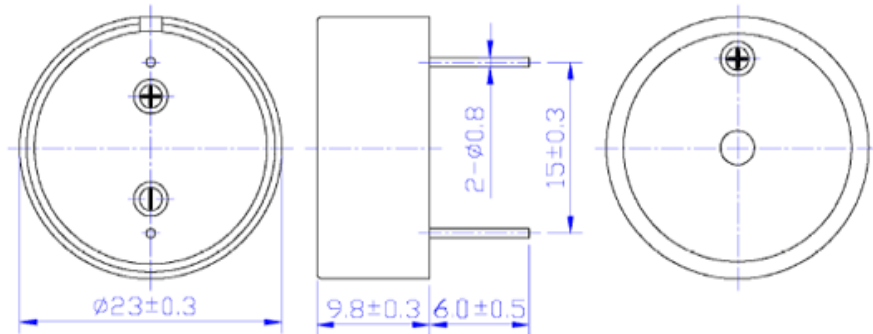

Frequency response

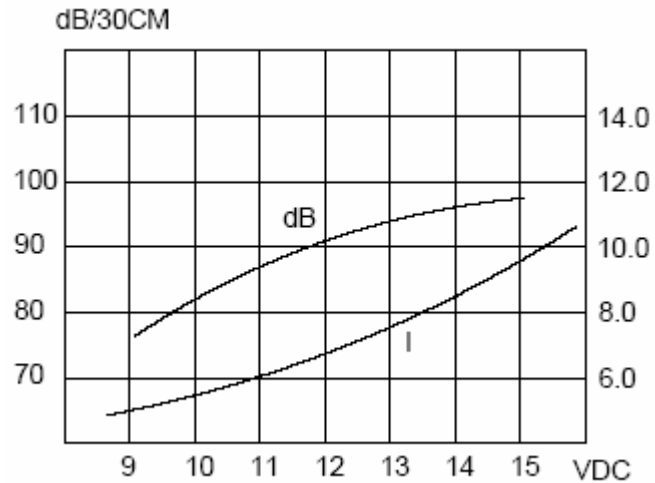

Piezo Buzzer (self drive)

■ BE-P2310C-M12-R3

Feature

- RoHS Compliance
- Built-in drive
- High SPL

Specification

Electrical specifications are measured at 20±2 Degree Celsius, Humidity 65±5%

Rated Voltage (Vdc)	12
Operating Voltage (Vdc)	3 ~ 16
Current Consumption (mA)	max. 15
Capacitance (pF) at 4kHz	-
S.P.L. (dB Distance at 30cm)	min. 90
Resonance Frequency (Hz)	3300
Operating Temperature Range (°C)	-20 ~ +60
Storage Temperature Range (°C)	-30 ~ +70
Contact type	Pin

BE-FS/69 Rev.:0

Copyright © 2006 Bujeon Europe GmbH. This specification is subject to change without notice in order to improve reliability, function or design. Please contact us for technical specifications before purchase or use.