


## Dimension

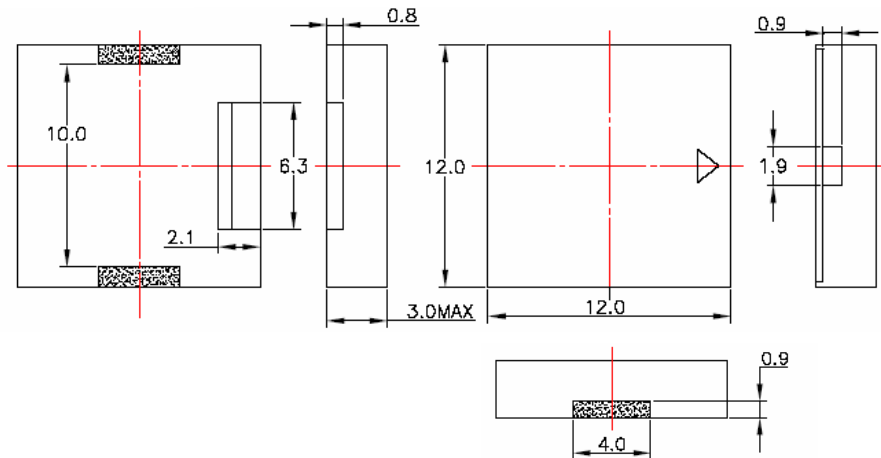

## Frequency response

*Will be up-dated soon.*

## Piezo Buzzer (external drive)

### ■ BE-Z1212A-T03-S

#### Feature

- RoHS Compliance
- Compact low profile form
- Low current consumption

#### Specification

Electrical specifications are measured at 20±2 Degree Celsius, Humidity 65±5%

Rated Voltage (Vp-p)	3
Operating Voltage (Vp-p)	1 ~ 25
Current Consumption (mA)	max. 2
Capacitance (pF) at 1kHz	15,000 ±30%
S.P.L. (dB Distance at 10cm)	min. 75
Resonance Frequency (Hz)	4000
Operating Temperature Range (°C)	-20 ~ +70
Storage Temperature Range (°C)	-30 ~ +80
Contact type	SMD