



Dimension

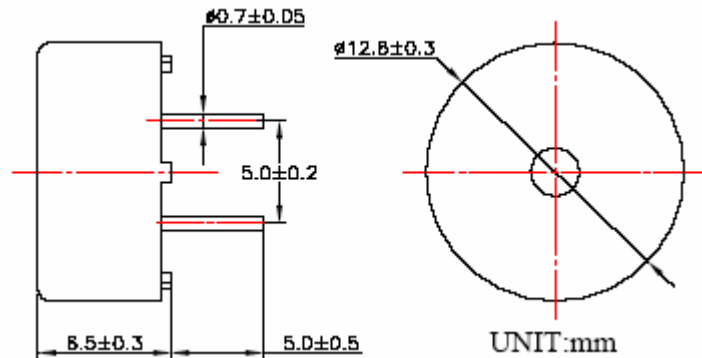

Frequency response

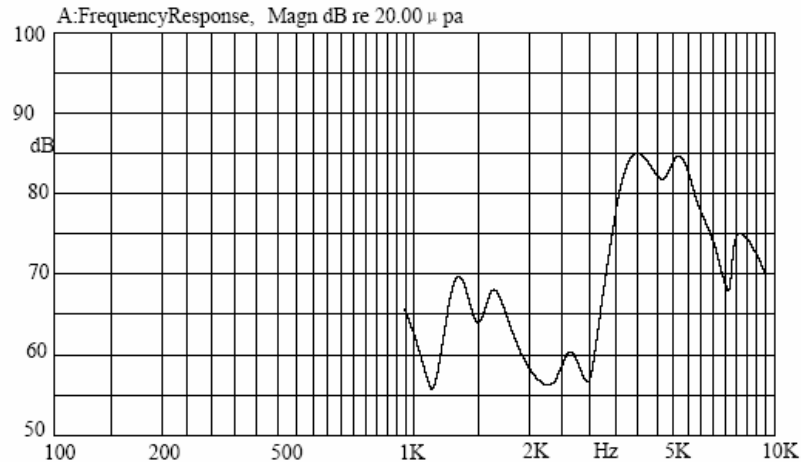

Piezo Buzzer (external drive)

■ BE-Z1365S-M05-S

Feature

- RoHS Compliance
- Compact low profile form
- Low current consumption

Specification

Electrical specifications are measured at 20 ± 2 Degree Celsius, Humidity $65 \pm 5\%$

Rated Voltage (Vp-p)	5
Operating Voltage (Vp-p)	1 ~ 30
Current Consumption (mA)	max. 1
Capacitance (pF) at 1kHz	12,000 $\pm 30\%$
S.P.L. (dB Distance at 10cm)	min. 70
Resonance Frequency (Hz)	4000
Operating Temperature Range ($^{\circ}$ C)	-20 ~ +80
Storage Temperature Range ($^{\circ}$ C)	-30 ~ +85
Contact type	Pin

BE-FS/69 Rev.:0

Copyright © 2006 Bujeon Europe GmbH. This specification is subject to change without notice in order to improve reliability, function or design. Please contact us for technical specifications before purchase or use.